

Strikowestofen Group



StrikoWestofen Group

Energy Efficiency For Melting And Holding Operation In Aluminum Foundries

Author: Dipl.-Ing. Klaus Malpohl

Representation
METEK Mühendislik
Dr. M. Cahit ENSAR
www.metekltd.com

Booth H3-D3E



StrikoWestofen Group

Specifications (in extracts) for melting and holding furnaces in foundries

- material to be charged (of Al foundries)
- operational conditions (for AL foundries)



StrikoWestofen Group

Charging material (1 of 2)

production of cast parts
in
gravity, sand or die casting process

50% ingots + 50% returns





StrikoWestofen Group

Charging material (2 of 2)

production of cast parts
in
gravity, sand or die casting process

50% liquid metal + 50% returns





StrikoWestofen Group

Requirements to melting operations

- **continuous metal supply**
 - metal take-out according to the customer's demand
 - constant metal take-out temperature (+/- 5°C)
 - high metal quality (density index < 8%)
- **high metal yield**
 - metal yield (> 99%)
 - (rule of thumb: 1% metal loss / 1 t/h melting capacity / 6.000 h/a / 2.000 €/t / results in a loss of 120.000,-- €/a.)
- **easy handling**
 - automated furnace control
 - charging
 - metal take-out
 - cleaning
- **low energy consumption**
 - for melting operation (< 600 kWh/t)
 - for holding operation (< 1 - 2 kWh/h x t)
 - (rule of thumb: 1 t/h melting capacity / 600 kWh/t / 6.000 h/a / 4,44 ct/kWh / energy = 160.000,-- €/a.)



StrikoWestofen Group


STRIKO MELTER® with ETAmax® system





StrikoWestofen Group

STRIKOMELTER® / Charging system

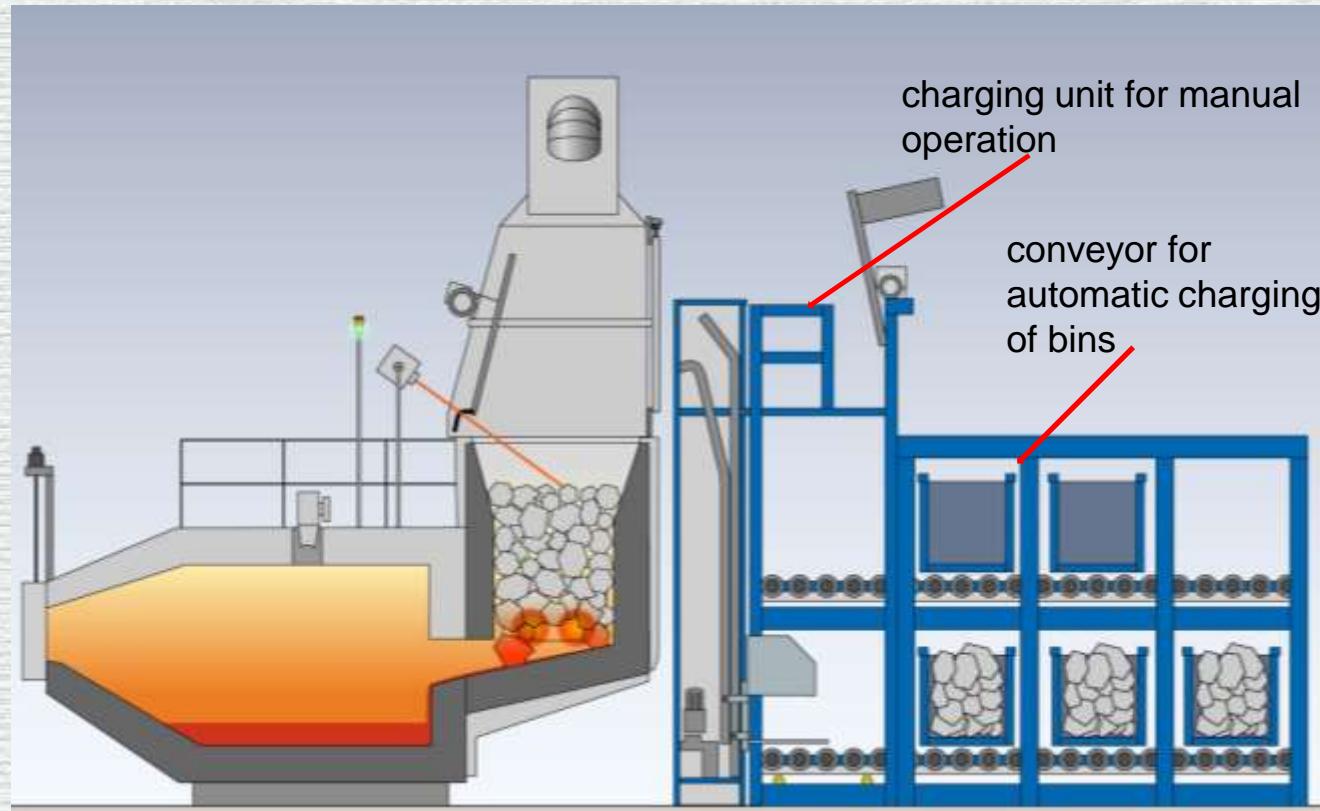



StrikoWestofen Group

STRIKOMELTER® / Charging system



charging unit for manual operation



StrikoWestofen Group

STRIKOMELTER® / Charging system




conveyor for automatic
charging of bins



StrikoWestofen Group


STRIKOMELTER® / Waste gas hood

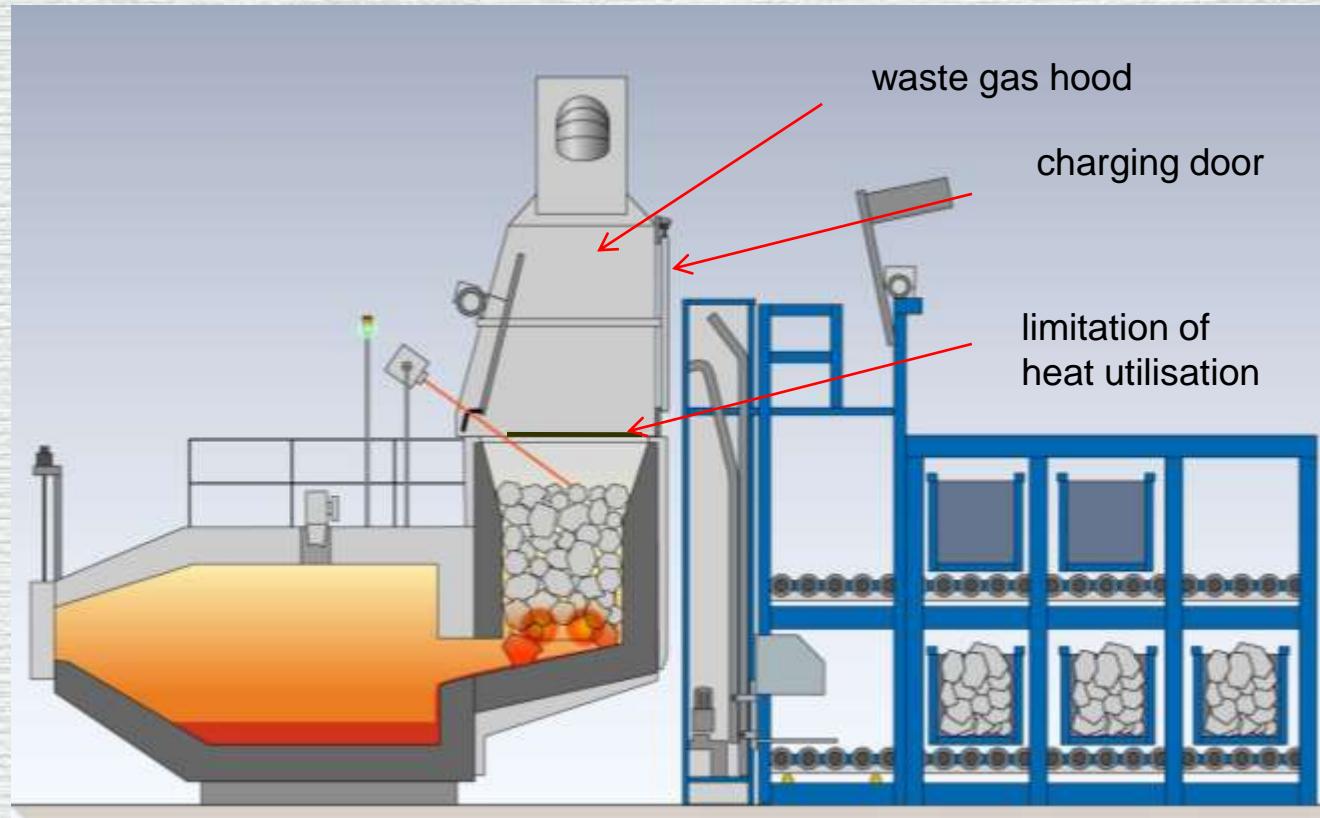



StrikoWestofen Group

STRIKOMELTER® / Laser scanner

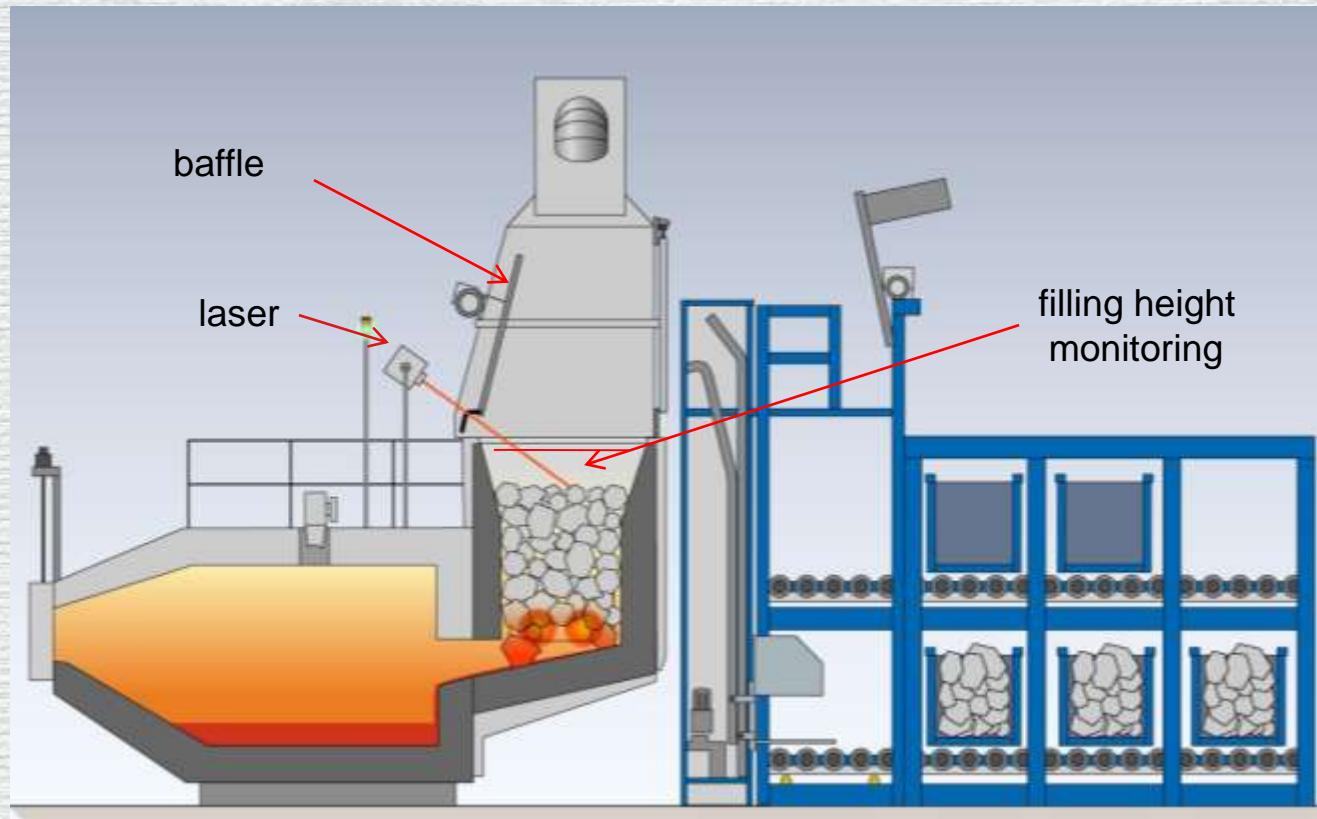




Example „shaft scanner“ for reduction of energy consumption

- increase in efficiency of the STRIKO MELTER®
decrease of energy consumption by 10 %
 - decrease of gas consumption by 60 kWh/t
 - melting capacity: (1 t/h at 6,000 h/a) 6.000 t/a
gas price (average of 2009) 4,44 ct/kWh
- energy savings: 16.000 €/a




StrikoWestofen Group

STRIKOMELTER® / Melting burners

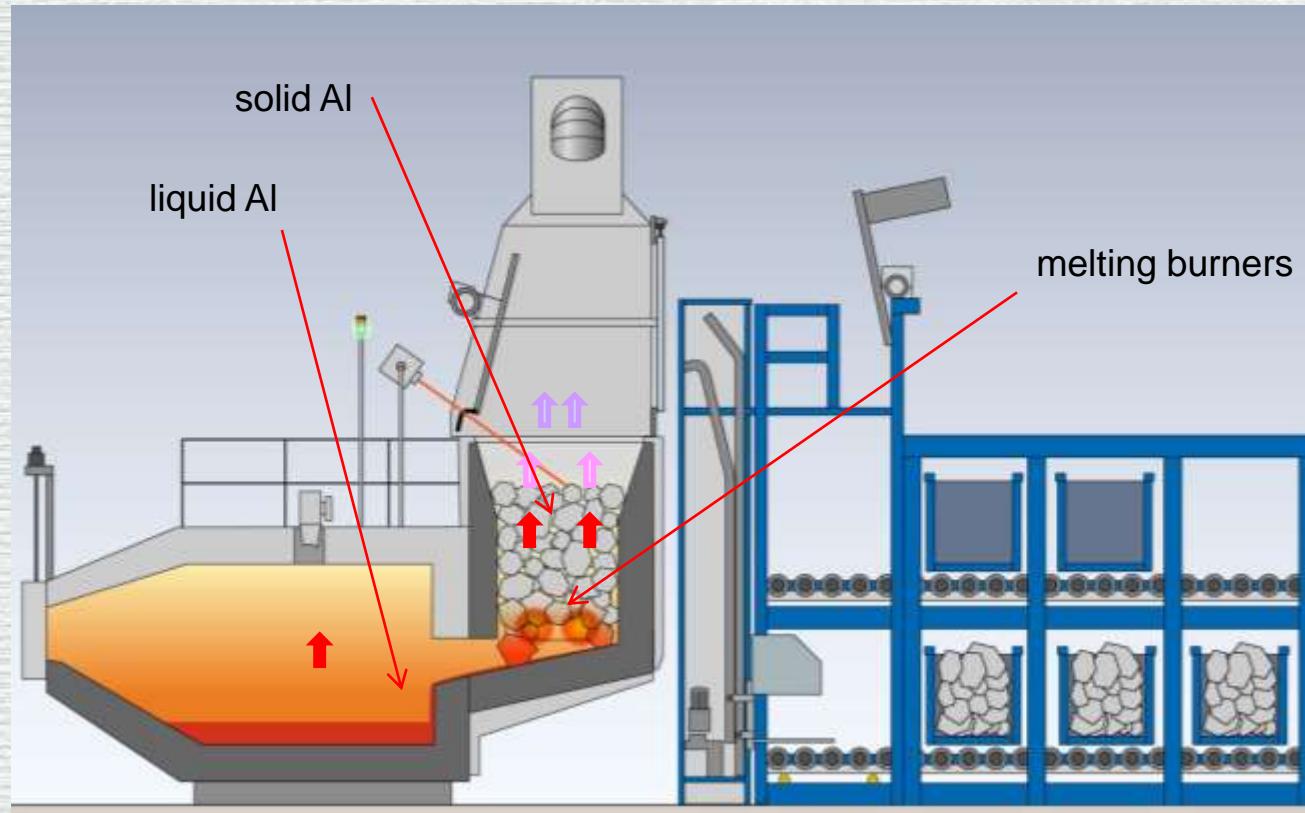


Thermal capacity of pure Al

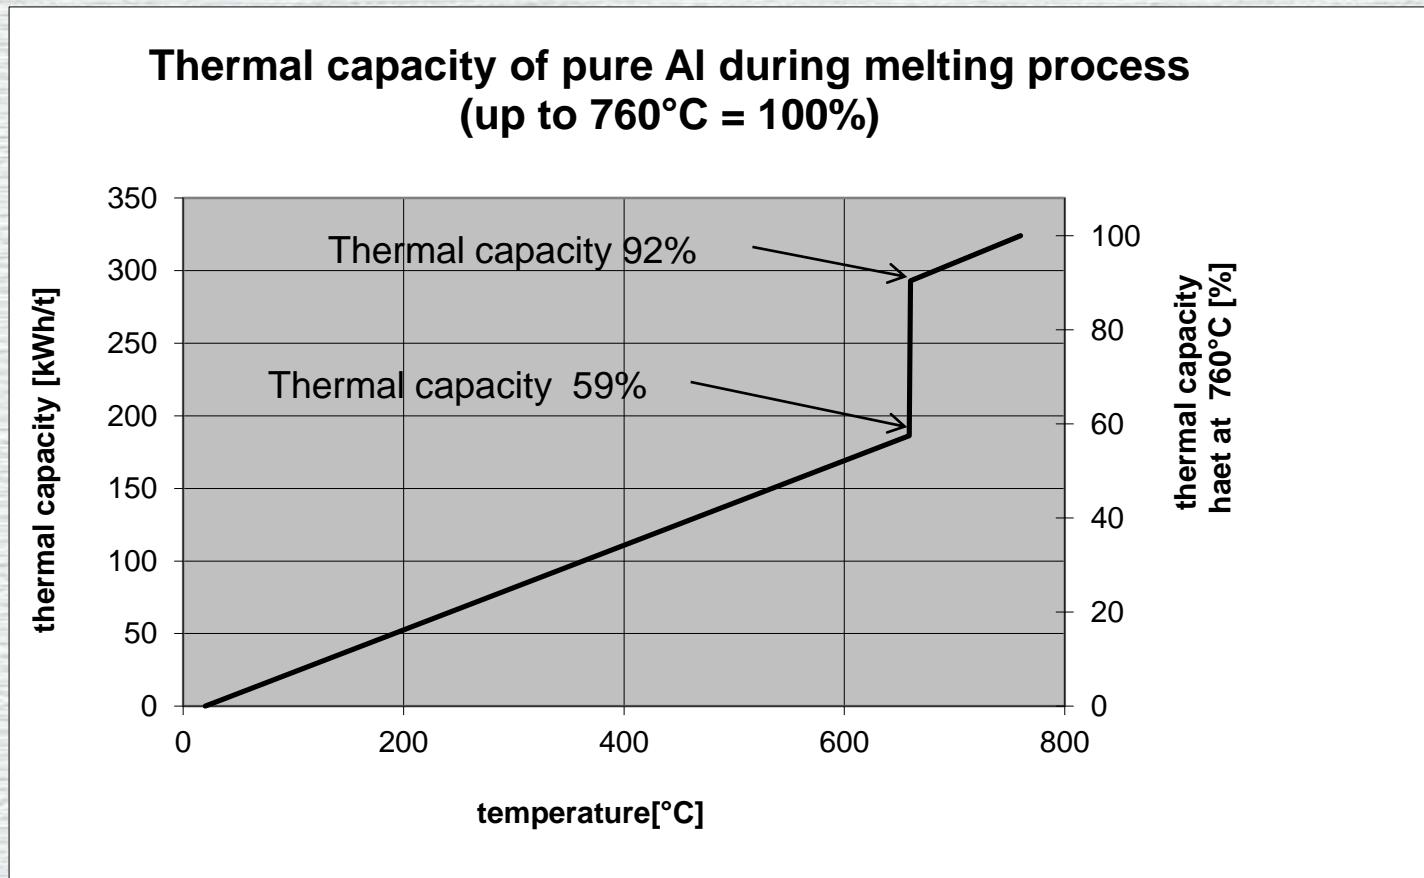




StrikoWestofen Group

STRIKOMELTER® / Melting burners

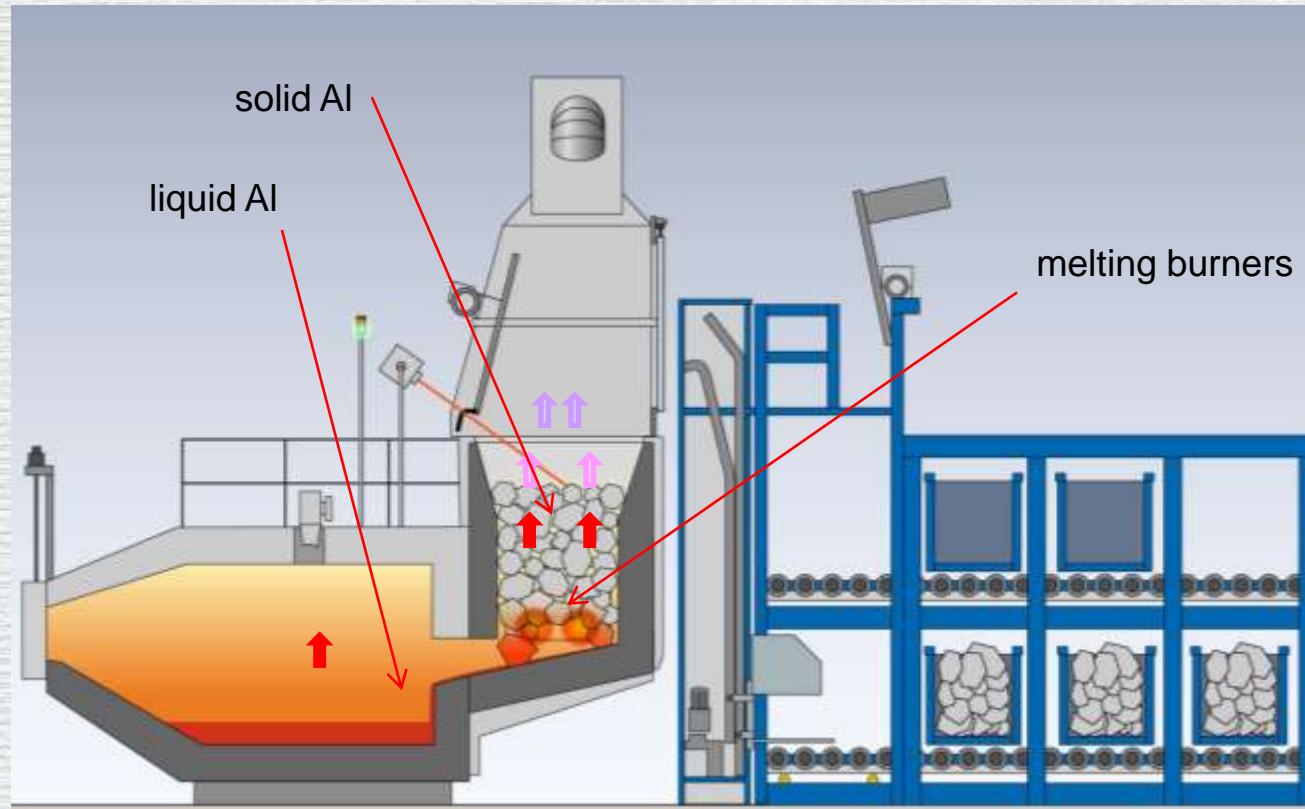

STRIKOMELTER® / Holding area

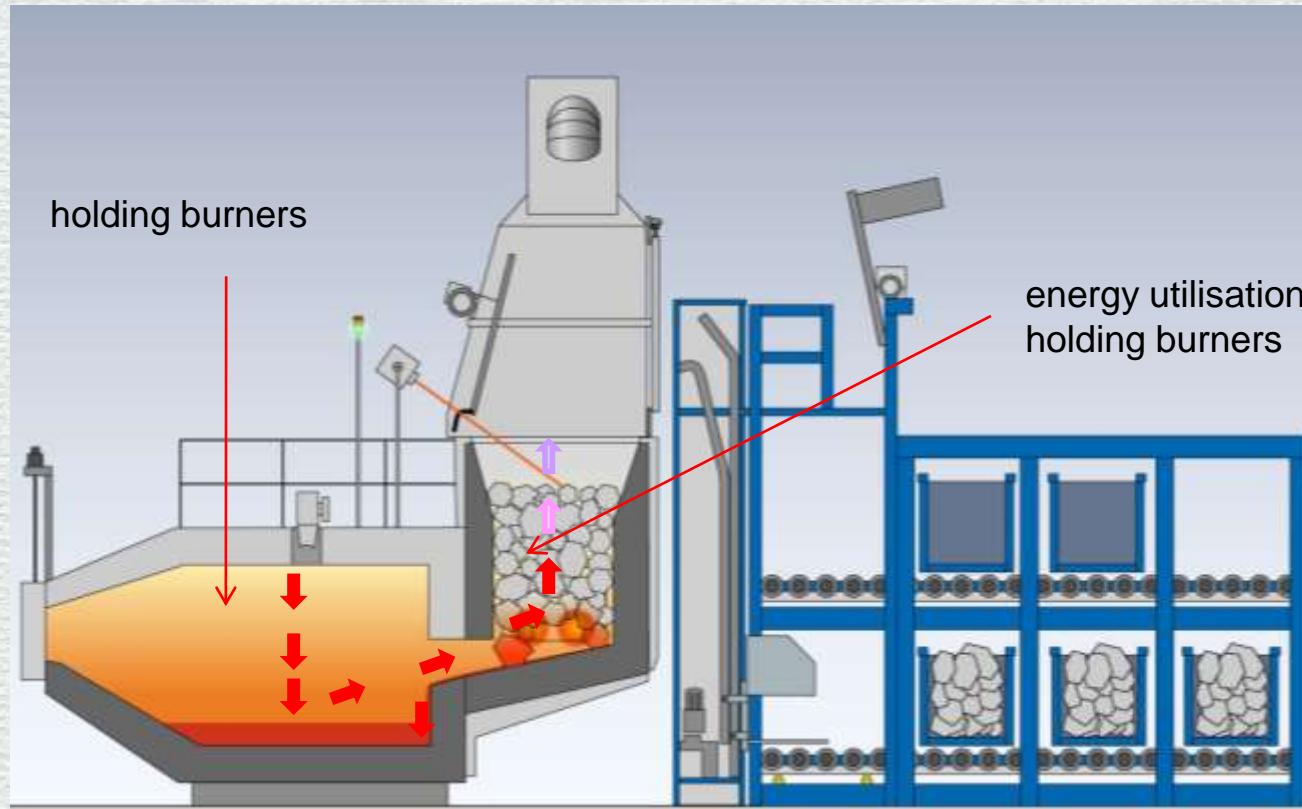



STRIKOMELTER® : Principle / summary

- shaft charging: no energy loss when charging
- pre-heating zone – ETAmax®-shaft, drying and pre-heating of the charging material, integrated waste heat utilisation
- melting area – fast melting at the material front
- holding chamber – overheating to a constant metal tap-out temperature
- utilisation of flue gas from the holding area



How can I control energy consumption?

- training of operators, workers, smelters
- checking the SOP (standard operating procedures)
- documentation / shift monitoring
- data recording integrated in the furnace unit
- regular furnace inspection and maintenance
- replacement of old furnaces



StrikoWestofen Group


Thank you for your attention



STRIKOMELTER® with ETAmax®

Booth H3-D3E

Congress Inovation 2010 - Ankiros

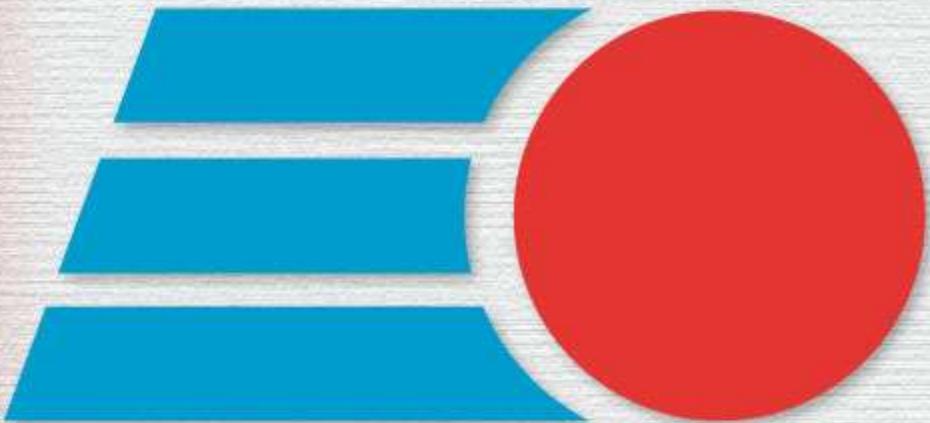

Strikowestofen Group



StrikoWestofen Group

Melt yield in a **STRIKOMELTER®**



StrikoWestofen Group

Rule of thumb for melt loss

1% melt loss

1 t/o/h melting capacity

5000 h/a

=

app. 100.000 €/a loss*

* Basis: Al- Ingots 2.000 €/t,

Composition of the charge



block material: 6 kg ingots



Return material, without flash



Gross metal yield StrikoMelter®

- 99,75 % for 100% ingots
- 99 % for 100% returns
- 99,4 % for 50 % ingot and 50 % return material




StrikoWestofen Group

Thank you again for your attention



STRIKOMELTER® with ETAmax®

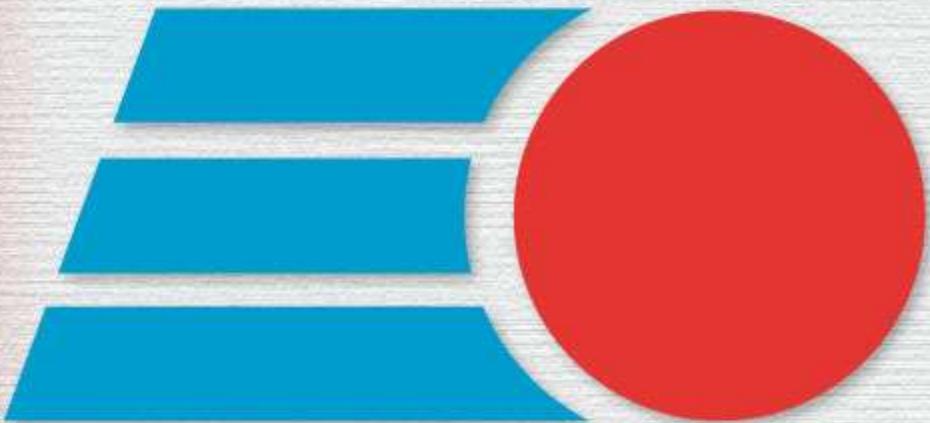

Strikowestofen Group